

S P E C I F I C A T I O N S

<i>NO. OF CHANNELS</i>	One (1)
<i>INPUT</i>	One (1) 350 Ω Load Cell or One (1) Summing Box Signal or One (1) 4-20mA Input Signal
<i>INCREMENTS</i>	0.1, 0.2, 0.5, 1, 2, 5
<i>DISPLAY</i>	Two (2) Line, 16 Digit, LCD, 0.4" Character
<i>TARE ADJUSTMENT</i>	Via Keypad
<i>OPERATING TEMP.</i>	32°F to 122°F (0°C to 50°C)

<i>POWER</i>	110-120 VAC, 50/60 Hz, 0.25 amp max. (220 VAC, 50/60 Hz available)
<i>CONNECTORS</i>	Power and Output - 1/2" Nylon Conduit Connector Load Cell - 1/2" Nylon Cord Connector
<i>ENCLOSURE</i>	NEMA 4X, UL Listed, Structural Foam Molded Enclosure
<i>OUTPUT</i>	4-20mA (Current Sourcing)
<i>ACCURACY</i>	Overall system accuracy 0.1 to 0.25% full scale
<i>OPTION</i>	Level Alarm, Set Point Relay



2430 Stanwell Dr, Concord, Ca 94520 USA
1-800-893-6723 US & Canada, Fax: 925-686-6713
WWW.forceflow.com / Info@forceflow.com

SOLO SRG2-1
SINGLE CHANNEL
DIGITAL INDICATOR

Drawn by: KBV



Date: 2/04/09

Verified:

Scale:

Drawing Number

31437

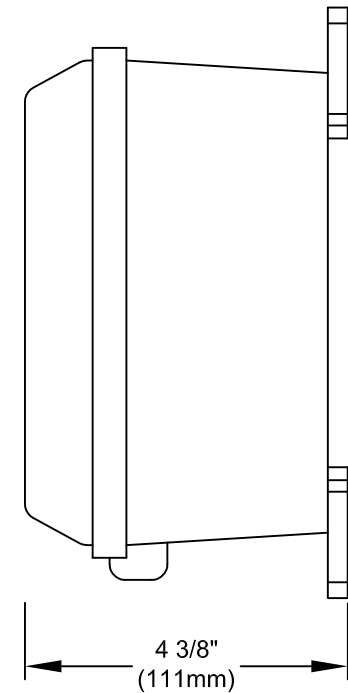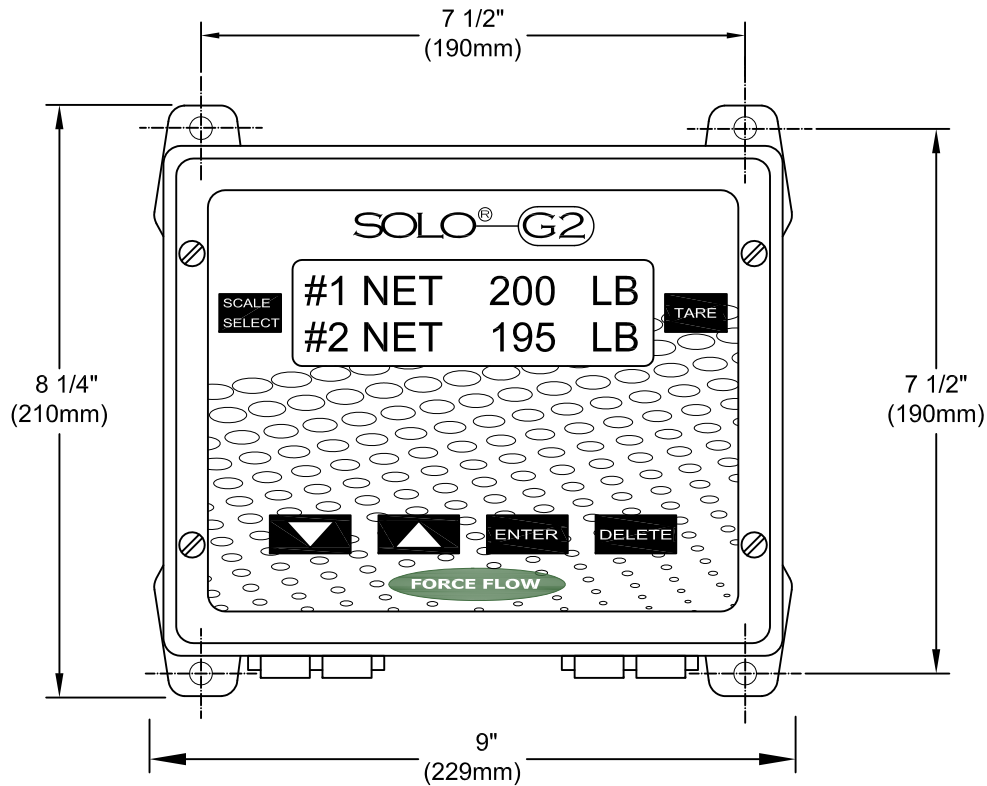

S P E C I F I C A T I O N S

<i>NO. OF CHANNELS</i>	Two (2)
<i>INPUT</i>	Two (2) 350 Ω Load Cell or Two (2) Summing Box Signal or Two (2) 4-20mA Input Signal
<i>INCREMENTS</i>	0.1, 0.2, 0.5, 1, 2, 5
<i>DISPLAY</i>	Two (2) Line, 16 Digit, LCD, 0.4" Character
<i>TARE ADJUSTMENT</i>	Via Keypad
<i>OPERATING TEMP.</i>	32°F to 122°F (0°C to 50°C)

<i>POWER</i>	110-120 VAC, 50/60 Hz, 0.25 amp max. (220 VAC, 50/60 Hz available)
<i>CONNECTORS</i>	Power and Output - 1/2" Nylon Conduit Connector Load Cell - 1/2" Nylon Cord Connector
<i>ENCLOSURE</i>	NEMA 4X, UL Listed, Structural Foam Molded Enclosure
<i>OUTPUT</i>	Two (2) 4-20mA (Current Sourcing)
<i>ACCURACY</i>	Overall system accuracy 0.1 to 0.25% full scale
<i>OPTION</i>	Level Alarm, Set Point Relay



2430 Stanwell Dr, Concord, Ca 94520 USA
 1-800-893-6723 US & Canada, Fax: 925-686-6713
 WWW.forceflow.com / Info@forceflow.com

SOLO SRG2-2
 DUAL CHANNEL
 DIGITAL INDICATOR

Drawn by: KBV

Date: 2/04/09

Verified:

Scale:

Drawing Number

31438